(51) International Patent Classification 6 : **H04L 12/64**	**A1**	(11) International Publication Number: **WO 97/09806**
		(43) International Publication Date: 13 March 1997 (13.03.97)

(54) Title: ATM NETWORK SWITCH HAVING ENHANCED CALL SETUP CAPABILITY
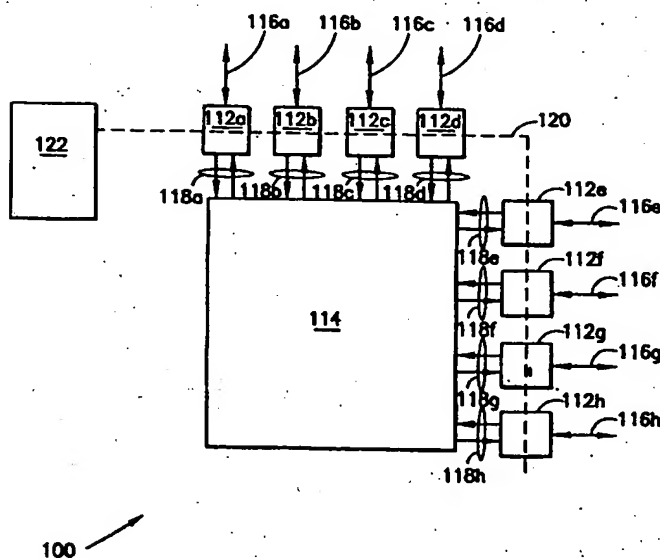
(57) Abstract

An ATM network switch (100) includes a plurality of slot controllers (112a-h) each coupled to a switch fabric (114) and an external link (116a-h). In addition, each slot controller (112a-h) is coupled to a system controller (122) via a LAN (120). A processor of each slot controller (112a-h) is programmed to forward Q.2931 messages to the system controller (122) via the LAN (120) and to receiv information from the system controller (122) via the LAN (120). The system controller (122) is programmed to interpret the Q.2931 messages, update the routing tables of the slot controllers (112a-h) via the LAN (120), and forward a packet containing the Q.2931 messages to an appropriate slot controller (112a-h) via the LAN (120) whereafter the slot controller (112a-h) assembles ATM cells containing th Q.2931 messages for transmission.

ATM NETWORK SWITCH HAVING ENHANCED CALL SETUP CAPABILITY

This application is related to U.S. Serial Number
08/624,812, the complete disclosure of which is hereby
incorporated by reference herein in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to asynchronous transfer mode (ATM)
switches. More particularly, the invention relates to an ATM
switch having enhanced call setup capability .

2. State of the Art

| A typical ATM network switch is shown in prior art Figure
1. The switch 10 in Figure 1 includes eight data processing
modules or "slot controllers" 12a-12h and a cross-connect switch
14. Each slot controller is bidirectionally connected to at
least one external data link 16a-16h. Each data link couples
the switch 10 to another node (switch) in the ATM network. In
addition, each slot controller 12a-12h is bidirectionally
coupled to the cross-connect switch 14 as indicated by the links
18a-18h.

In operation, ATM data enters the switch 10 via one of the
links 16a-16h and either terminates in the switch (in the case
of data for the switch of data for a local user) or exits the
switch through another one of the links 16a-16h. The ATM data
consists of well defined cells of fifty-three bytes each. The
first five bytes of an ATM cell are overhead bytes which include
addressing information and the remaining forty-eight bytes is
the payload. The addressing information is in the form of a
virtual path indicator (VPI) and a virtual channel indicator
(VCI). When a cell enters the switch through a link 16a-16h,
the slot controller 12a-12h coupled to the link examines the
VPI/VCI data for the cell and determines where the cell should
be sent via the switch fabric 14. More particularly, the slot
controller compares the VPI/VCI data to a routing table in the

slot controller in order to determine which other slot
controller in the switch should receive the cell. For example,
an ATM cell entering the switch via slot controller 12a will be
examined by the slot controller 12a which will compare the
VPI/VCI of the cell to a routing table in the slot controller
12a. Based on the information in the routinbg table, the slot
controller 12a will append a switch fabric destination code to
the cell (or will otherwise modify the address header of the
cell) and will then send the cell into the switch fabric 14.
The switch fabric 14 uses the destination code (or otherwise
modified VPI/VCI) to route the cell to another slot controller,
e.g. 12h, for further transmission through the network. When
the slot controller 12h receives the cell from the switch
fabric, it reads the modified VPI/VCI, compares it to a routing
table in the slot controller 12h, modifies the VPI/VCI according
to its table, and sends the cell onto the network via the link
16h.

The above described ATM switch operation provides a virtual
circuit connection between a calling party and a called party.
In order for the virtual circuit connection to operate, each
switch in the virtual circuit must know where to route cells
received from the calling party and the called party. Thus, in
order to establish a virtual circuit connection between a
calling party and a called party, each switch in the virtual
circuit must be provided with the necessary information about
the route through which data will be sent. Establishment of a
virtual circuit connection is accomplished via "call setup
signalling". Examples of different call setup signalling
methods are disclosed in previously incorporated U.S. Serial
Number 08/624,812. In general, however, the signalling process
involves the transmission of "special" ATM cells which contain
the call setup information rather than "call data", i.e. data
exchanged between a calling party and a called party, in their
payload. According to various ATM standards adopted by ANSI or
the ITU and/or proposed by the ATM Forum, protocols are provided
for determining when one or more ATM cells contain payload
information other than "call data", e.g. call setup information

or other "signalling" information. In addition, various ATM
standards also provide protocols for interpreting signalling
information including call setup information.

Turning now to prior art Figure 2, the various signalling
protocols the ATM standard are often referred to as "layers"
since they build upon the ATM cell by adding additional protocol
coding. The first layer is referred to as the ATM Adaptation
Layer (AAL) which provides a protocol for encoding the header of
an ATM cell to indicate the presence of signalling data in the
payload. The AAL protocol has several versions, e.g. AAL1,
AAL3/4, AAL5, etc. According to the AAL5 protocol, one or
multiple ATM cells may be specified as having payloads
containing signalling data. The significance of the AAL
protocols is that the ATM cells containing signalling payloads
must, from the point of view of the network, be
indistinguishable from ATM cells which contain call data in
their payloads, while at the same time being identifiable by ATM
switches as being signalling cells.

An extension to the AAL5 protocol is the SAAL (Signalling
ATM Adaptation Layer) which allows reliable transport of
messages according to the Q.93B or Q.2931 protocol. As shown in
Figure 2, the SAAL extension is shown as a second layer
designated Q.SAAL. The third layer in Figure 2 is designated as
Q.93B. However, this layer could, and now generally is, the
Q.2931 layer.

During a call setup transaction, signalling information
according to the Q.2931 protocol is encoded according to the
SAAL protocol. The SAAL protocol takes the Q.2931 messages and
builds frames which may be reliably transferred throughout the
ATM network. In order to travel through the network, these
frames must be split up into ATM cells, and the AAL layer
provides the protocol for converting SAAL frames into ATM cells.

According to the state of the art, in order to be Q.2931
compatible, a slot controller in an ATM switch would be provided

4

with means for detecting an AAL cell, means for reconstructing
SAAL frames, and means for interpreting Q.2931 messages. The
Q.2931 messages provide each slot controller with information
necessary to build routing tables in order to set up a virtual
circuit connection.

Referring once again to Figure 1, a typical call setup
transaction may be described as follows. The slot controller
12a receives an ATM cell, inspects the VPC/VCI and determines
that the cell is part of an AAL5 transaction. The slot
controller accumulates the necessary cells for the AAL5 packet,
utilizes the SAAL protocol to assemble Q.2931 messages,
interprets the Q.2931 messages, and updates its routing table in
response thereto. Since, in order to set up a virtual circuit
connection, the Q.2931 messages must be read by multiple
switches on the network, the slot controller must pass the
information through the switch network and out of the switch via
another slot controller. Therefore, the slot controller 12a
must then take the Q.2931 messages and assemble a new set of ATM
cells with an added switch fabric address, and send these ATM
cells via the switch fabric to the other slot controller in the
switch which will form a part of the virtual connection through
the switch. For example, in the case of a virtual circuit
connection between slot controller 12a and slot controller 12h,
the controller 12a will address the cells to controller 12h.
Slot controller 12h will then receive the first cell, inspect
the VPC/VCI and determine that the cell is part of an AAL5
transaction. The slot controller 12h will accumulate the
necessary cells for the AAL5 packet, utilize the SAAL protocol
to assemble the Q.2931 messags, interpret the Q.2931 messages,
and update its routing table. The slot controller 12h must then
take the Q.2931 messages and assemble a new set of ATM cells
with the appropriate VPI/VCI headers and send them onto the
network via the link 16h.

Those skilled in the art will appreciate that during call
setup, the slot controller resources are heavily taxed. In
addition, since the call setup messages must pass through the

5

switch fabric, call setup will be delayed when the switch fabric
is congested. Moreover, the call setup transactions will add to
switch fabric congestion.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide an
improved ATM switch having enhanced call set up capability.

It is also an object of the invention to provide methods
and apparatus for relieving the slot controllers of at least
some of the call set up processing.

It is another object of the invention to provide methods
and apparatus for reducing congestion in the switch fabric by
relieving the switch fabric from handling call setup requests.

In accord with these objects which will be discussed in
detail below, the ATM switch of the present invention includes a
plurality of slot controllers each of which is bidirectionally
coupled to a switch fabric and each of which is bidirectionally
coupled to an external link. In addition, each slot controller
is bidirectionally coupled to a local area network (LAN) which
is bidirectionally coupled to a system controller. The
processor of each slot controller is programmed to forward
Q.2931 messages to the system controller via the LAN and to
receive information from the system controller via the LAN. The
system controller is programmed to interpret the Q.2931
messages, update the routing tables of slot controllers via the
LAN, assemble a packet containing a new Q.2931 message(s), and
forward the packet to an appropriate slot controller via the
LAN; whereafter the slot controller assembles ATM cells with
appropriate VPI/VCI headers and forwards them onto the network.
According to a presently preferred embodiment, the slot
controllers are programmed to forward all Q.SAAL frames to the
system controller; and the system controller is programmed to
extract Q.2931 messages from the Q.SAAL frames.

Preferred aspects of the ATM switch according to the invention include: implementing the LAN according to an Ethernet protocol, monitoring the status of the slot controllers via TCP protocol, providing a backup system controller, and providing an internal buffering system in each slot controller so that if a backup system controller is brought online, no call setup data will be lost. Additional objects and advantages of the invention will become apparent to those skilled in the art upon reference to the detailed description taken in conjunction with the provided figures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic block diagram of a prior art ATM switch;

Figure 2 is a schematic diagram illustrating the logical layer structure of state of the art ATM protocols;

Figure 3 is a schematic block diagram of an ATM switch according to the invention;

Figure 4 is a flow chart of a first embodiment of the invention; and

Figure 5 is a flow chart of a second and presently preferred embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figure 3, the preferred ATM switch 100 according to the invention is an ATM switch sold by General DataComm, Inc., of Middlebury, CT, under the trademarks STROBOS and APEX which is modified as described below. The ATM switch 100 includes eight data processing modules or "slot controllers" 112a-112h and a cross-connect switch or "switch fabric" 114. Each slot controller is bidirectionally connected to at least one external data link 116a-116h. Each data link couples the

switch 100 to another node (switch) in the ATM network. In
addition, each slot controller 112a-112h is bidirectionally
coupled to the cross-connect switch 114 as indicated by the
links 118a-118h. According to a presently preferred embodiment
of the invention, each slot controller 112a-112h is
bidirectionally coupled to an Ethernet Local Area Network 120
and a system controller 122 is bidirectionally coupled to the
LAN 120 as well. The system controller 122 may be any suitable
processing unit such as a SUN, MOTOROLA, or INTEL processor with
associated random access memory, BIOS, non-volatile program
memory, etc. Each of the slot controllers 112a-112h is an
intelligent slot controller having an on board processor,
associated RAM, BIOS, non-volatile program memory, etc.
According to the presently preferred embodiment, each slot
controller is also provided with a buffer for buffering
communications via the LAN.

    Referring now to Figure 4, a first embodiment of the
invention is shown in high level flow-chart form. Each slot
controller examines the header of each ATM cell it receives.
According to the invention, if it is determined by the slot
controller at 200 that the cell is not an AAL5 cell, the slot
controller modifies the VPI/VCI at 202 according to known
procedures and forwards the cell at 204 either into the switch
fabric or onto the external link as appropriate. If it is
determined at 200 that the cell is an AAL5 cell, the slot
controller interprets the AAL5 header information to, e.g.,
determine packet size. Thereafter, as additional AAL5 cells are
received, the slot controller accumulates the cells necessary
for the AAL5 packet at 206. When the packet is complete, the
slot controller applies the SAAL protocol at 208 to generate a
Q.2931 message (e.g., a call set-up request). The slot
controller then forwards the Q.2931 message at 210 to the system
controller via the LAN which is represented by the dotted line
212 in Fig. 4. The system controller interprets the Q.2931
message at 300. In response, the system controller assembles a
packet at 302 containing a Q.2931 message, and forwards the
packet at 304 to an appropriate slot controller via the LAN.

whereafter the slot controller assembles ATM cells with
appropriate VPI/VCI headers and forwards them onto the network.
Typically, the cells will be forwarded to the slot controller
forming the other end of the virtual circuit connection being
set up for transmission onto the network to the next switch to
be used in the virtual circuit connection. According to the
invention, the packet assembled at 302 is forwarded at 304 to
the slot controller via the LAN, and not through the switch
fabric. The system controller also preferably sends messages at
306 to the affected slot controllers to update the routing
tables of those slot controllers based on the call set-up
information. Typically, the routing tables of two slot
controllers will be updated, the slot controller which received
that AAL5 cell initially, and the slot controller forming the
other end of the virtual circuit connection being set up.

In this embodiment, the system controller relieves the slot
controllers of much of the call set-up processing and
significantly reduces congestion in the switch fabric. The slot
controller which receives the AAL5 cells maintains some of the
signalling message (call set-up) processing, specifically the
SAAL protocol processing and sends the SAAL acknowledgement back
to the switch (or device) from which the AAL5 cells originated.
According to a second and presently preferred embodiment,
substantially all of the procesing of signalling cells is
performed by the system controller as the slot controller is not
provided with QSAAL capability.

Turning now to Figure 5, each slot controller examines the
header of each ATM cell it receives. According to the second
embodiment of the invention, if it is determined by the slot
controller at 400 that the cell is not an AAL5 cell, the slot
controller modifies the VPI/VCI at 402 according to known
procedures and forwards the cell at 404 either into the sitch
fabric or onto the external link as appropriate. If it is
determined at 400 that the cell is an AAL5 cell, the slot
controller accumulates the cells necessary for generating a
packet at 406. When the packet is complete, the slot controller

forwards the packet at 408 to the system controller via the LAN.
The dotted line 412 represents the LAN link to the system
controller. When the system controller receives the packet, it
applies the SAAL protocol at 500 to assemble Q.2931 messages.
In response, the system controller assembles a packet at 502
containing a Q.2931 message, and forwards the packet at 504 to
an appropriate slot controller via the LAN, whereafter the slot
controller assembles ATM cells with appropriate VPI/VCI headers
and forwards them onto the network. Typically, the cells will be
forwarded to the slot controller forming the other end of the
virtual circuit connection being set up for transmission onto
the network to the next switch to be used in the virtual circuit
connection. According to the invention, the packet assembled at
502 is forwarded at 504 to the slot controller via the LAN, and
not through the switch fabric. The system controller also
preferably sends messages at 506 to the affected slot
controllers to update the routing tables of those slot
controllers based on the call set-up information. Typically, the
routing tables of two slot controllers will be updated, the slot
controller which received that AAL5 cell initially, and the slot
controller forming the other end of the virtual circuit
connection being set up.

It will further be appreciated that the system controller
will, although not shown in the Figure, prepare an ATM cell
according to the SAAL protocol for the slot controller which
received the AAL5 packet to send back as confirmation that the
packet was received intact.

As mentioned above, the preferred embodiment of the
invention includes monitoring the status of the slot controllers
via TCP protocol. For example, at startup, the system
controller will poll the LAN with a TCP SYN message which will
provide continuous information about the status of the slot
controllers and their external links. This information can be
used to alert other devices on the network that a link is down.
In addition, this information can be used during call setup to
streamline the procedure; i.e., with the system controller

performing the call setup, it is not necessary to send
information through the switch fabric in order to discover that
a slot controller or its external link is down. Another
preferred feature of the ATM switch of the invention includes
providing a backup system controller, and providing an internal
buffering system in each slot controller so that if a backup
system controller is brought online, no call setup data will be
lost.

There have been described and illustrated herein several
embodiments of an ATM switch having enhanced call setup
capability. While particular embodiments of the invention have
been described, it is not intended that the invention be limited
thereto, as it is intended that the invention be as broad in
scope as the art will allow and that the specification be read
likewise. Thus, while particular a particular number of slot
controllers have been disclosed, it will be appreciated that
more or fewer slot controllers could be utilized. It is not
uncommon to provide sixteen slot controllers Also, while the
slot controllers have been shown with each having a single
external link, it will be recognized that slot controllers could
have more than one external link. Moreover, while particular
configurations have been disclosed in reference to the LAN, it
will be appreciated that other configurations could be used as
well. Furthermore, while the switch has been disclosed as
utilizing the current AAL5, QSAAL, and Q.2931 protocols, it will
be understood that different ATM protocols can be used to
achieve the same or similar function as disclosed herein. It
will therefore be appreciated by those skilled in the art that
yet other modifications could be made to the provided invention
without deviating from its spirit and scope as so claimed.

Claims:

1. An ATM network switch, comprising

  a) a plurality of slot controllers, each slot controller being coupled to an external data link;

  b) a switch fabric means bidirectionally coupled to each of said slot controllers for switching ATM cells from each slot controller to each other slot controller;

  c) a local area network bidirectionally coupled to each of said slot controllers;

  d) a system controller bidirectionally coupled to said local area network, wherein

     and each slot controller includes,

     i) means for receiving ATM cells from the external data link,

     ii) means for transmitting cells on the external data link,

     iii) routing table means for routing ATM cells through the switch,

     iv) means for determining whether an ATM cell contains signalling information,

     v) means for accumulating ATM cells containing first signalling information,

     vi) means for transmitting said first signalling information to said system controller via said local area network,

     vii) means for receiving second signalling information from said system controller via said local area network,

     said system controller including,

     i) means for receiving said first signalling information from each of said slot controllers via said local area network,

     ii) means for processing said first signalling information,

     iii) means for generating said second signalling information, and

     iv) means for transmitting said second signalling information to each of said slot controllers via said local area network.

2. An ATM network switch according to claim 1, wherein:
        each said system controller includes means for generating
routing table update information which is provided to said slot
controller by said local area network.

3. An ATM network switch according to claim 1, wherein:
        said first and second signalling information is in a Q.2931
format.

4. An ATM network switch comprising:
    a plurality of slot controllers, each slot controller being
connected to at least one external data link and comprising
means for receiving ATM cells from each link and for
transmitting ATM cells on each link;
    means for switching data cells from each slot controller to
any other slot controller;
    a system controller for receiving a signalling message sent
from another device in the network, for sending the message on
to the next device in the network, for determining from the
message, where appropriate, information relating to the routing
of the connection within the switch and for storing said
information, the system controller being linked to each slot
controller via s econdary data link separate from the ATM links
within the switch;
    and wherein each slot controller comprises:
        means for identifying from the ATM cells received on the
external data link or links to the slot controller those cells
containing data relating to signalling, for extracting the data
from the cells and for passing the data to the system controller
via the secondary data link; and
        means for receiving signalling data from the system
controler via the secondary data link, and for transmitting the
signalling data in ATM cells via the external data link.

5. An ATM network switch according to claim 1, comprising
monitoring means for monitoring the continuity of each extgernal
data link to the next device in the network.
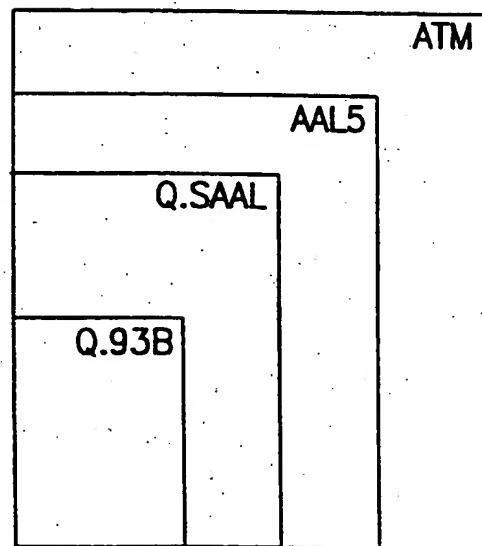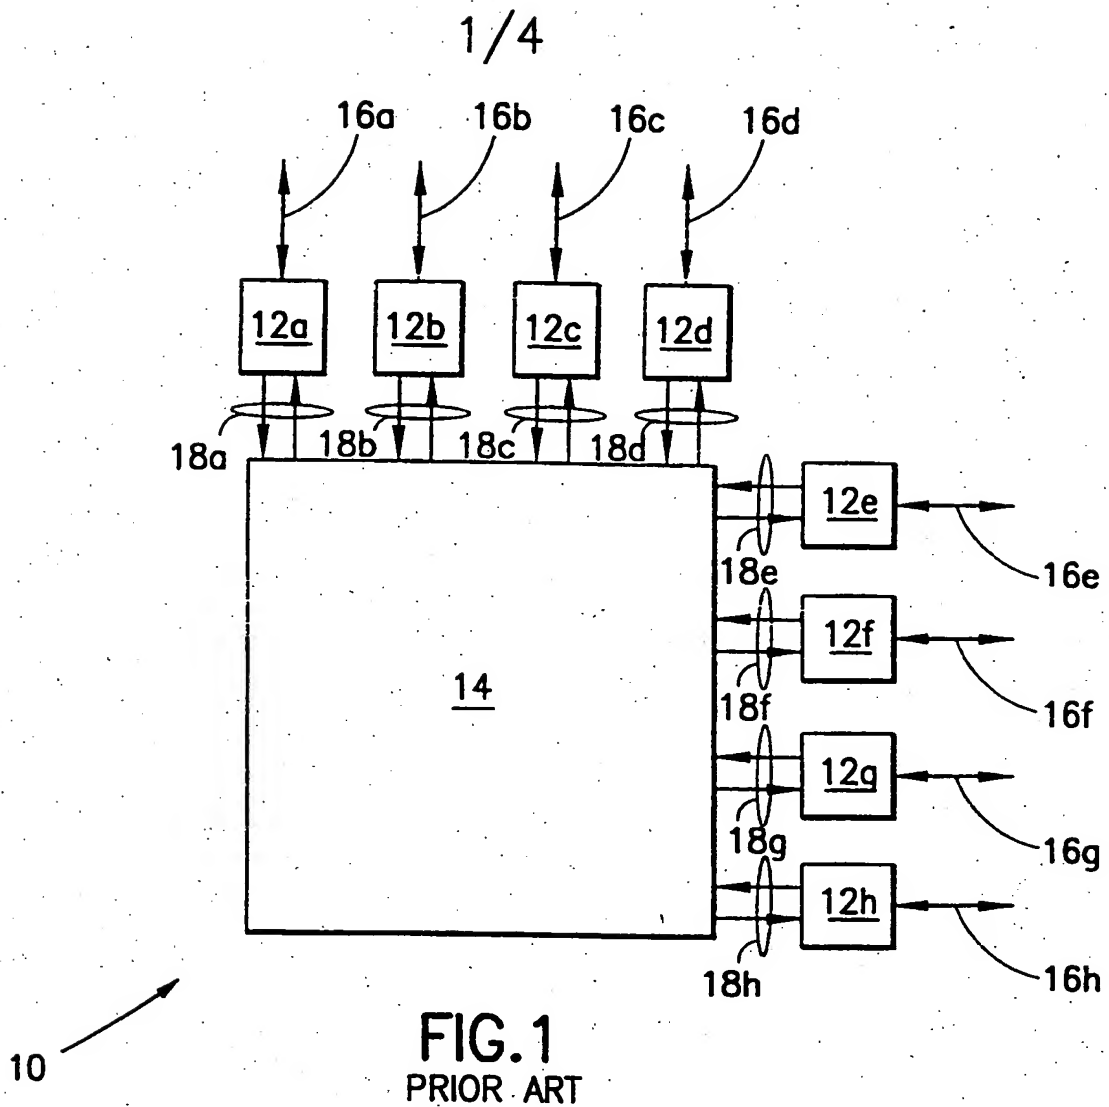
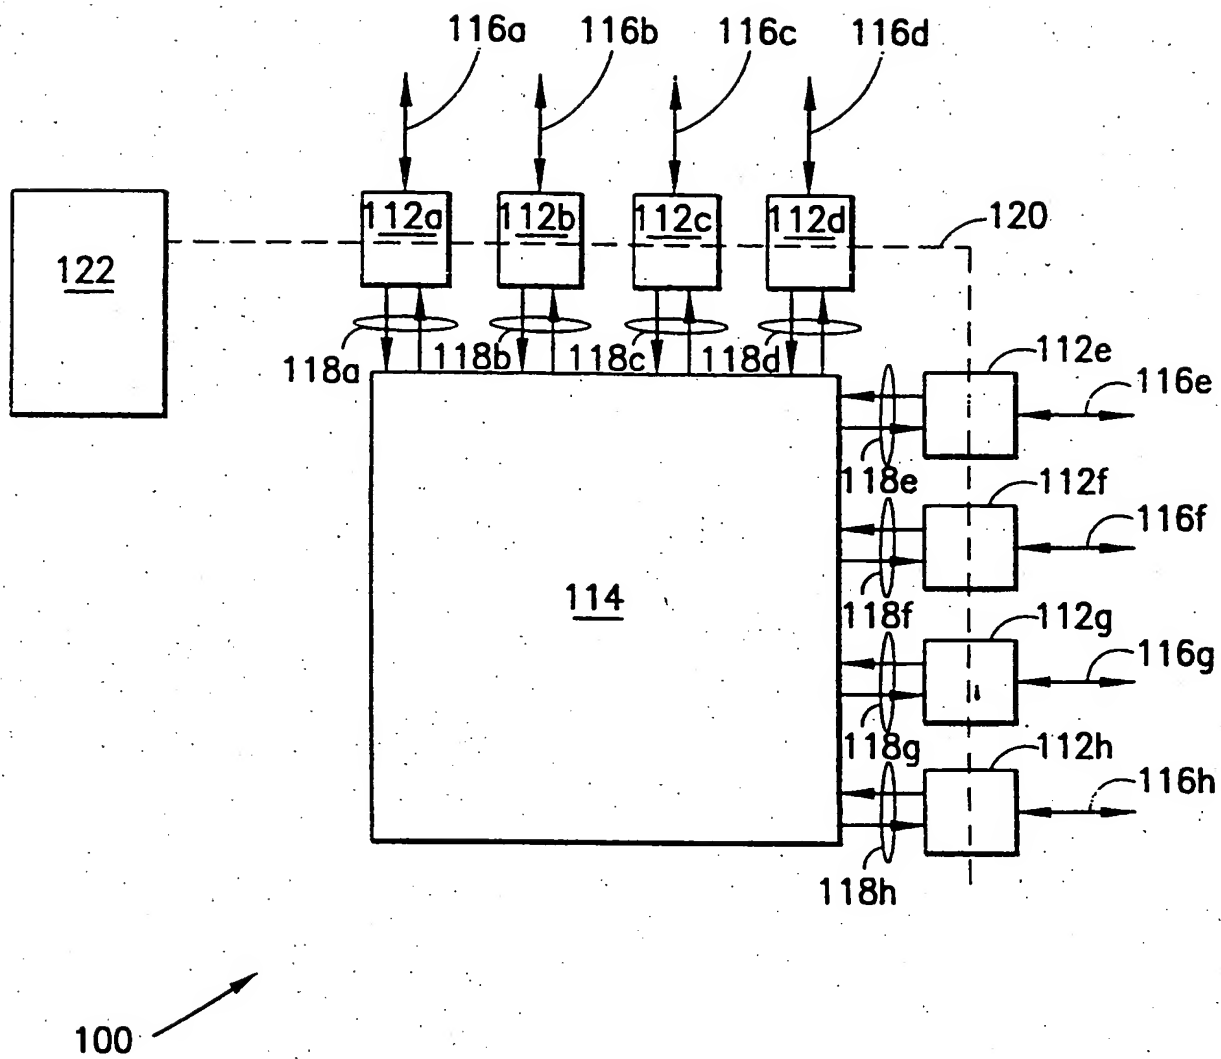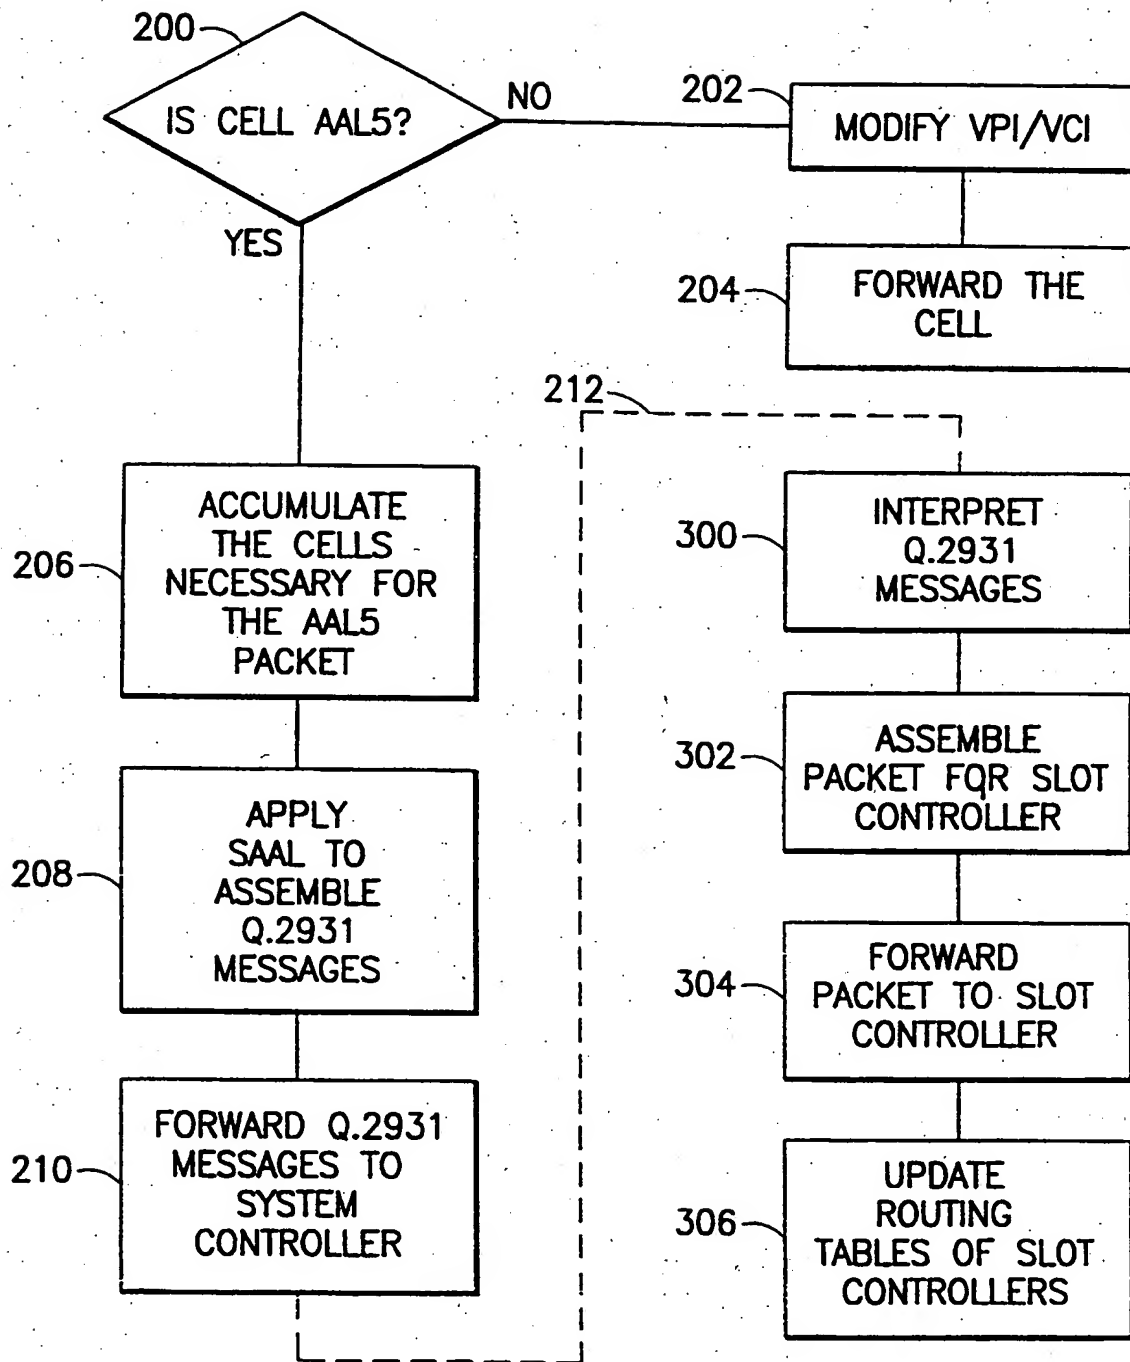**FIG.1**
PRIOR ART

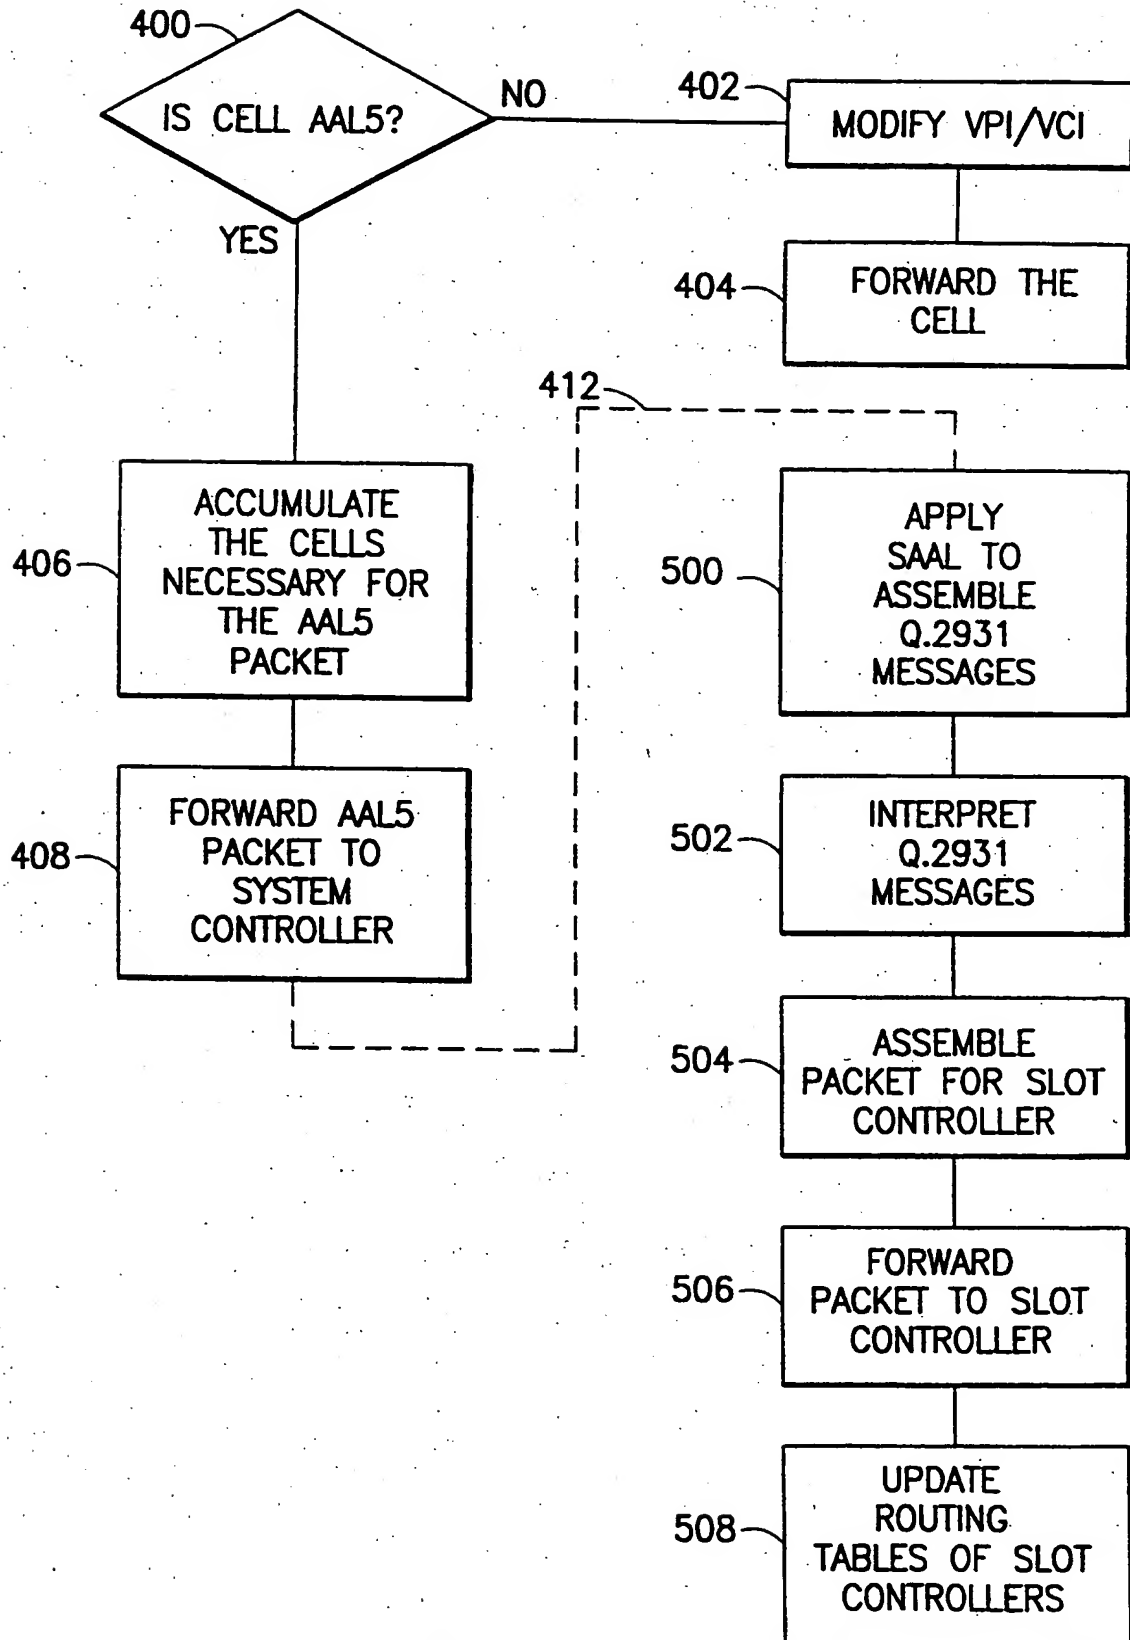
FIG.2
PRIOR ART

FIG.3

FIG.4

FIG.5

INTERNATIONAL SEARCH REPORT

A.	CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04L 12/64
US CL :370/60.1

According to International Patent Classification (IPC) r to both national classification and IPC

B.	FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/60.1, 58.2, 60, 68.1, 94.1, 94.2, 110.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C.	DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,381,410 (GRENOT) 10 January 1995, see entire document	1-5
X	US, A, 5,303,236 (KUNIMOTO ET AL.) 12 April 1994, see entire document	1-5
X	US, A, 5,101,404 (KUNIMOTO ET AL.) 31 March 1992, see entire document	1-5

☐ Further documents are listed in the continuation of Box C.   ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 SEPTEMBER 1996	1 1 OCT 1996

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	RUSSELL BLUM